

## P 240 A-E IVECO

NUEVO

DISPONIBLE



### ESPECIFICACIONES DEL PRODUCTO

Altura máxima: 24m

Deslocamento horizontal máximo de 11,6m


Capacidade do cesto 250 kg

Cesto de fibra, com lotação para 2 operadores,  
isolada a 1000V

Chassi IVECO (PB 3500kg)

### INFORMACIÓN DEL PRODUCTO

Información del lugar

PALFINGER PORTUGAL, 2135-169 - Portugal 

Vendedor

Palfinger portugal

Disponibile

Disponibile

Disponibile en

20.12.2024

Tipo de Producto

Nuevo

Email

comercial@palfinger.pt

Teléfonos de Contacto

00351263650990

# **P 240 A-E SMART**

**COMPACT DESIGN  
AND QUICK AND  
EASY TO USE**

**LIFETIME EXCELLENCE**



## STRENGTHS

- Lightweight and compact double articulated aerial platform for work in tight spaces, mounted on a 3.5 t truck. The double pantograph unit guarantees great versatility and the ability to move over in elevated positions.
- Multifunction electric controls for greater precision, speed, and manoeuvring comfort
- Single stabilisation system for quick positioning
- All metal structural work features cathodic electrodeposition coating, with KTL system patented by PALFINGER.

## STANDARD












- 12V socket on basket
- 230V / 16A socket or 110V / 16A 12V socket on basket
- 40 l diesel tank
- Aerial section centring viewer for machine closure
- Air/water line from the column to the basket
- Anti-collision system cab/boom
- Cage rotation 90°+ 90°
- Hour meter
- Painting with cataphoresis process, with KTL system patented by PALFINGER
- Preparation for insulation upgrade ability
- Set of 4 spreader plates with proper housing on the chassis
- Top boom protection.

## MAIN ACCESSORIES


- 12V electric pump for emergency lowering
- 230V / 16A or 110V / 16A electric pump with quick couplings
- Fibreglass basket instead of the standard aluminum version
- 1000V insulation on fibreglass basket
- Fixed rotary lamp on turret
- Folding left and right bordering side, h 200 mm
- Inclinometer with audio alarm signal and signal lights relating to aerial work conditions
- Plastic storage toolbox at the rear
- Protective brushes for arm extension
- Side protection
- Wired remote control for emergency commands.



## TECHNICAL DATA

	Max. working height	22.9 m		Basket rotation	2x90°
	Max. working height from platform deck	20.9 m		Basket dimensions	m 1.4 x 0.84 x 1.1 h
	Max. working outreach	11.6 m		Max. load permitted on basket	250 kg - 230 kg (FBG)
	Outrigger width	2.6 m		Stabilization	4, "A"-shaped, direct descent outriggers
	Operating angle of main arm	-25°/+73°		Gross vehicle weight	3.5 t
	Turret rotation	290°			

## WORK AREA

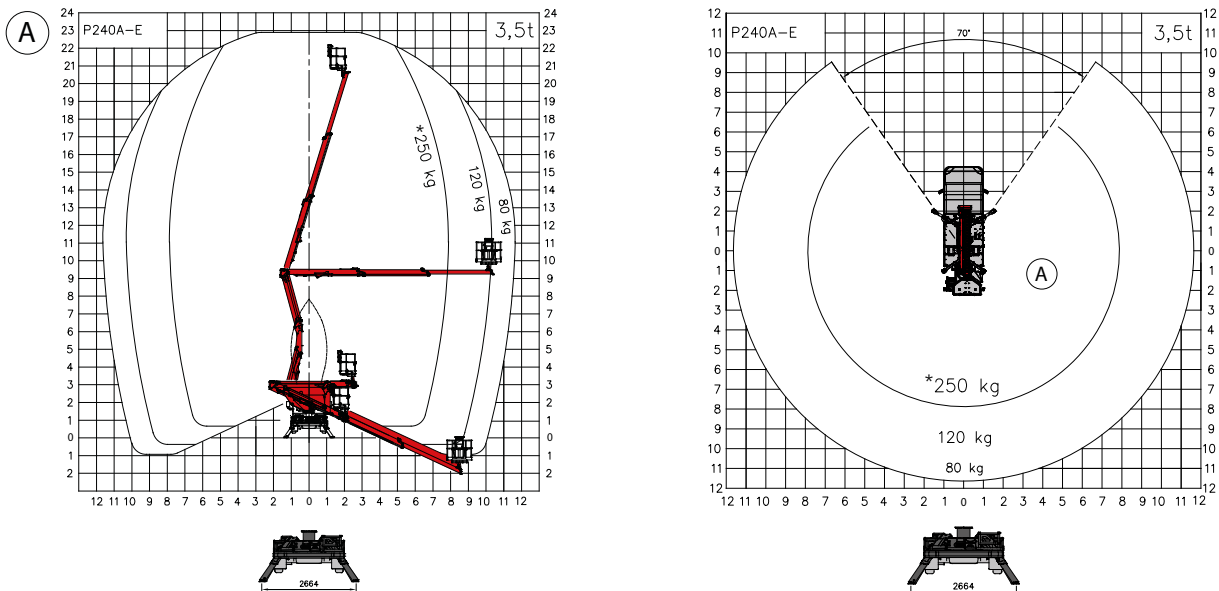

Weights may vary by +/- 5%  
 Technical data may vary by +/- 3%  
 \*230 kg for FBG basket

## DIMENSIONS



**CONTACT DETAILS****PALFINGER PLATFORMS ITALY SRL**

Via Enrico De Nicola, 31  
41122 Modena (MO) - Italy  
TEL: +39 059 252426  
EMAIL: [info@palfingerplatformsitaly.it](mailto:info@palfingerplatformsitaly.it)

**KP-P240AEP1+EN**

The illustrations in the brochure may show units equipped with optional accessories and not always the standard version. National legislation must be complied with during construction/assembly. The dimensions stated are not binding. The company cannot be held responsible for any changes in technical information, inaccuracies, or translation errors.